

Sweeper & Collection Sweepers



www.nc-engineering.com

- Hydraulic link box.
- A Sweeper/Collector.
- Oil flow requirements 7.6 gallons per Minute (35 litres)
- Can be separated to use as standard link box
- Range available in widths 6' 10", 7' 10", 8' 10" (2.08m, 2.38m and 2.69m)
- Various combinations of bristles (segments) available, i.e. Polypropylene and Steel or Polypropylene
- Quick attach onto tractor
- Galvanised canopy as standard
- Standard Hardened wear edge on link box
- Option Kerb Brush
- Option Dribble bar for dust suppression
- Park stands for sweeper when not in use.



- PTO driven models available in widths 6' & 7' (1.83m, 2.13m)
- Hydraulic driven models available in widths 6' 7' & 8' (1.83m, 2.13m & 2.44m)
- Sweepers to suit from 40hp tractors upwards
- Can be angled to sweep to either side
- Heavy duty adjustable rear castors provides a more efficient brushing action
- Standard bristles – 22" (558mm) diameter
- Various combinations of bristles (segments) available, i.e. Polypropylene and Steel or Polypropylene
- Quick attach onto tractor
- Front mounted sweepers
- Option heavy duty Pneumatic tyred castors recommended for road use.
- Option hydraulic angling of sweep direction
- Option mounting attachment to suit handler




- Sizes available 7', 7'9", 8' 9" (2.13m, 2.36m, 2.66m)
- Can be manufactured to fit existing buckets
- Buckets supplied as standard with hardened wear edge
- Standard mixed bristles, half polypropylene, half steel
- All polypropylene available on request.
- Hydraulic driven sweeper.
- Hydraulic motor is mounted on top of sweeper away from damage
- Drive to the rotor is via a reliable chain drive which has all the added benefit of reducing the machine width and allowing the operator to get close to the wall/kerb than a direct drive machine



- Heavy duty galvanised steel construction.
- Push brush – no moving parts.
- Custom mounting to forks or 3 point linkage
- Integrated parking stands for storage.
- Choice of 3 sweeping widths, 2.0m, 2.5m & 3.0m
- 11 rows of quick change bristles
- Low dust creation – easy clean design



- Easily Adjustable
- Simple brush replacement
- Low maintenance design
- Bi-directional sweeper
- A range of skid steer bracket available 5', 5'6", 6' (1.52m, 1.67m, 1.83m).

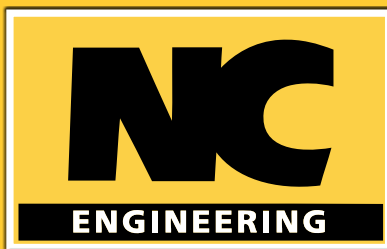

Optional Extras

Link A Sweep Options

- Water tank and dribble bar
- Kerb brush
- Non-standard colour

Road Runner Options

- Hydraulic angled headstock
- Water tank and dribble bar
- Non-standard colour
- 12" pneumatic tyre and heavy duty castor
- Forklift attachment

Bucket Brush Options

- Water tank and dribble bar
- Built to suit customer bucket
- Non-standard colour



Revision.03 December 2018

In accordance with our policy of continued development we reserve the right to alter specification and design without notice.



NC Engineering (Hamiltonsbawn) Ltd
2 Killyrudden Road
Hamiltonsbawn
Co.Armagh
Northern Ireland
BT61 9SF

Tel: 028 38 871970
Fax: 028 38 870362

www.nc-engineering.com

