



DESIGNED TO PERFORM BUILT TO LAST



**HIGH QUALITY MUCK
SPREADERS & TRAILERS**

Product Range 2025





At Ktwo we manufacture the highest quality farm machinery that is designed to perform and is built to last.

We are a family run business established in the 1980's, using the finest engineering standards with the latest manufacturing processes, we ensure that all products perform efficiently and last for many years.

www.ktwo.co.uk



Not only are we known for our innovation and quality, our after-sales service is unrivalled with our own field service engineers available to support you.

We are the only UK manufacturer to offer a full range of both muck spreaders and trailers, and all our machines carry a 3 year warranty.

CONTENTS

MUCK SPREADERS


Eco	4
Duo	6
Evo	12
Bio	14
Optional Extras	18
Tyres & Colours	19

TRAILERS

Curve	20
Root	22
Compact & Push	24
Dumper	26
Contractor	28
Low Loader	30
Flatbed	32
Optional Extras	34
Tyres & Colours	35

ECO

Vertical Beater Muck Spreader

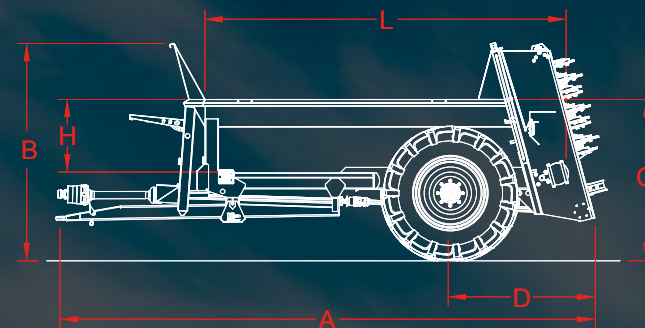

KEY FEATURES

- Fine and accurate spread.
- Open flighted and dynamically balanced rotors rotate at 417rpm to provide a precise spread.
- 6-tooth spiral flight construction provides an even spread coverage.
- Designed for small to medium sized farm/owner operators.
- Fitted with a single-piece Rögelberg rotor drive gearbox with greaseable long-life driveline bearings, providing smooth transfer of power and unmatched reliability.
- Socketed floor slats and two 14mm marine grade chains offer a minimum breaking strength of 48 tonnes.
- Floor chains driven by a high tensile 50mm six tooth sprocketed shaft with a variable speed control.
- Full LED light units with automatic light covers (when fitted with optional slurry door) provide excellent rearward visibility for added peace of mind.
- Reversible hardened boron steel rotor teeth increase the service life and durability of the spreader.

SPECIFICATIONS

	MODEL		
	Eco 65	Eco 75	Eco 85
Maximum Carrying Capacity (kg)	6,500	7,500	8,500
Volume - Level filled (m³)	4.5	5.2	5.9
Volume - Heaped without ext. (m³)	6.5	7.5	8.5
Volume - Max. heaped (m³)	7.6	8.8	10.0
Axle beam (mm)	1 x 80 x 80	1 x 80 x 80	1 x 80 x 80
No. of axle studs / brake size (mm)	8 / 355 x 80	8 / 355 x 80	8 / 355 x 80
Standard wheels	16.9 x 30 14PR	16.9 x 30 14PR	18.4 x 34 14PR
No. of floor chains / chain size (mm)	2 / 14	2 / 14	2 / 14
Rear floor drive roller diameter (mm)	50	50	50
PTO input speed (rpm)	540	540	540
Power requirement (hp)	75	85	95
Unladen weight (kg)	2,630	3,130	3,680

DIMENSIONS


		mm	ft		mm	ft		mm	ft
Overall length	A	5,380	17' 7"		5,880	19' 3"		6,330	20' 9"
Overall height	B	2,350	7' 8"		2,350	7' 8"		2,530	8' 3"
Loading height	C	1,750	5' 9"		1,750	5' 9"		1,930	6' 4"
Rear overhang	D	1,490	4' 11"		1,605	5' 3"		1,745	5' 9"
Internal length	L	3,380	11' 1"		3,880	12' 9"		4,330	14' 3"
Internal height	H	800	2' 8"		800	2' 8"		900	2' 11"
Overall width		2,560	8' 5"		2,560	8' 5"		2,600	8' 6"
Loading width		1,850	6' 1"		1,850	6' 1"		1,950	6' 5"
Internal width		1,500	4' 11"		1,500	4' 11"		1,500	4' 11"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

DUO

Vertical Beater Muck Spreader

KEY FEATURES

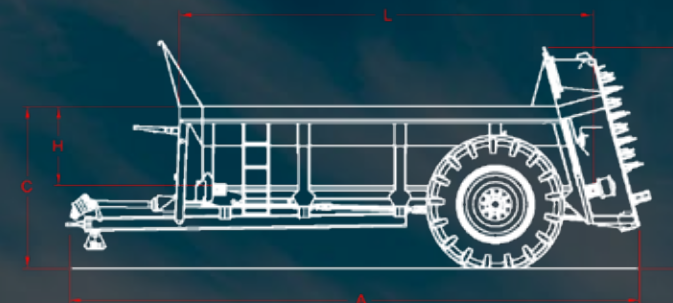

- Advanced rotor design with open, dynamically balanced flights and unique stepped structure for increased strength.
- Enhanced rotor speeds: Duo at 417rpm.
- Larger bottom spinner paddles for extended spreading widths.
- Wide 1500mm beater set with 800mm diameter spinning paddles for precise material broadcast.
- Hardened boron steel rotor teeth with M16 bolts for durability.
- High-efficiency single-piece Rogelberg rotor gearbox.
- Standard wide-angle front PTO shaft.
- Robust 150mm square commercial axles.
- Effective 420 x 180mm S-Cam brakes with 25 – 35mm cylinders.
- Flared body sides for greater capacity and “easy out” design for improved loading and flow.
- 4 x 14mm marine grade floor chains with closely spaced slats for durability.
- 6 tooth floor drive sprockets for extended life.
- Versatile bolt-on fixed hitch, easily interchangeable.
- Optional sprung drawbar with robust 180mm, 12mm thick box section construction for strength and manoeuvrability.
- Single piece body panels for enhanced strength.
- High-quality finish with shot blasting and 130-micron 2-pack paint.

DUO Vertical Beater Muck Spreader

SPECIFICATIONS

	MODEL						
	Duo 80	Duo 105	Duo 120	Duo 135	Duo 150	Duo 165	Duo 180
Maximum Carrying Capacity (kg)	8,000	10,000	11,500	12,500	14,000	16,500	18,000
Volume - Level filled (m³)	5.5	7.5	8.2	9.3	11.1	12.5	13.6
Volume - Heaped without ext. (m³)	7.8	11.0	12.0	13.5	15.7	17.7	19.4
Volume - Max. heaped (m³)	10.4	14.1	15.7	17.5	19.5	22.0	24.1
Axle beam (mm)	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	420 / 85 R30	460 / 85 R38	460 / 85 R38	520 / 85 R38	520 / 85 R38	580 / 70 R38	580 / 70 R38
No. of floor chains / chain size (mm)	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14
Rear floor drive roller diameter (mm)	50	55	55	55	60	60	60
PTO input speed (rpm)	540	540	540	540	540	540	540
Power requirement (hp)	85	95	105	115	120	140	160
Unladen weight (kg)	4,130	4,360	4,560	5,010	4,660	5,110	5,650


DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	5,950	19'6"	6,580	21'7"	6,980	22'11"	7,580	24' 10"	6,980	22' 11"	7,580	24' 10"	8,075	26' 6"
Overall height	B	2,425	7'11"	2,580	8'6"	2,980	9'9"	3,015	9' 11"	3,270	10'9"	3,285	10'10"	3,285	10'10"
Loading height	C	1,850	6'1"	2,115	6'11"	2,115	6'11"	2,150	7' 1"	2,450	8' 1"	2,500	8' 3"	2,500	8' 3"
Internal length	L	3,950	13'0"	4,500	14'9"	4,900	16'1"	5,500	18' 1"	4,900	16' 1"	5,500	18' 1"	6,000	19' 8"
Internal height	H	875	2'10"	1,050	3'5"	1,050	3'5"	1,050	3' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"
Overall width		2,620	8'7"	2,660	8'9"	2,660	8'9"	2,820	9' 3"	2,820	9' 3"	2,900	9' 6"	2,900	9' 6"
Loading width		2,000	6'7"	2,100	6'11"	2,100	6'11"	2,100	6' 11"	2,200	7' 3"	2,200	7' 3"	2,200	7' 3"
Internal width		1,500	4'11"	1,500	4'11"	1,500	4'11"	1,500	4' 11"	1,500	4' 11"	1,500	4' 11"	1,500	4' 11"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

DUO HD

Vertical Beater Muck Spreader

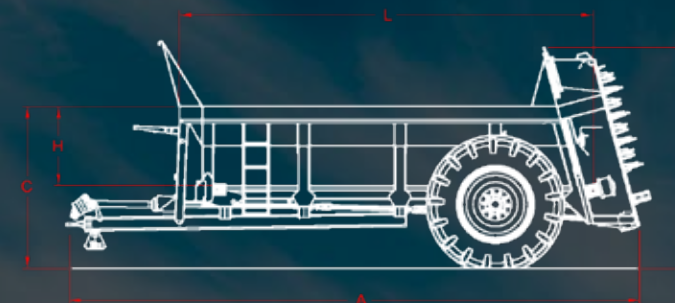

KEY FEATURES

- Advanced rotor design with open, dynamically balanced flights and unique stepped structure for increased strength.
- Enhanced rotor speeds: Duo HD at 386rpm.
- Larger bottom spinner paddles for extended spreading widths.
- Wide 1700mm beater set with 1050mm diameter spinning paddles (MK6) for precise material broadcast.
- Hardened boron steel rotor teeth with M16 bolts for durability.
- High-efficiency single-piece Rogelberg rotor gearbox.
- Standard wide-angle front PTO shaft.
- Robust 150mm square commercial axles.
- Effective 420 x 180mm S-Cam brakes with 25 – 35mm cylinders.
- Flared body sides for greater capacity and “easy out” design for improved loading and flow.
- 4 x 14mm marine grade floor chains with closely spaced slats for durability.
- 6 tooth floor drive sprockets for extended life.
- Versatile bolt-on fixed hitch, easily interchangeable.
- Optional sprung drawbar with robust 180mm, 12mm thick box section construction for strength and manoeuvrability.
- Single piece body panels for enhanced strength.
- High-quality finish with shot blasting and 130-micron 2-pack paint.

SPECIFICATIONS

	MODEL		
	Duo 155 HD	Duo 175 HD	Duo 195 HD
Maximum Carrying Capacity (kg)	16,000	18,000	20,000
Volume - Level filled (m³)	11.4	12.8	14.0
Volume - Heaped without ext. (m³)	15.6	17.6	19.3
Volume - Max. heaped (m³)	19.3	21.9	23.9
Axle beam (mm)	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	520 / 85 R38	580 / 70 R38	580 / 70 R38
No. of floor chains / chain size (mm)	4 / 14	4 / 14	4 / 14
Rear floor drive roller diameter (mm)	60	60	60
PTO input speed (rpm)	1000	1000	1000
Power requirement (hp)	120	140	160
Unladen weight (kg)	5,270	5,720	6,250


DIMENSIONS

		mm	ft	mm	ft	mm	ft
Overall length	A	7,050	23'2"	7,650	25'1"	8,150	26'9"
Overall height	B	3,350	11'0"	3,340	10'11"	3,340	10'11"
Loading height	C	2,480	8'2"	2,470	8'1"	2,470	8'1"
Internal length	L	4,995	16' 5"	5,595	18'4"	6,095	20'0"
Internal height	H	1,350	4'5"	1,350	4'5"	1,350	4'5"
Overall width		2,820	9'3"	2,880	9'5"	2,880	9'5"
Loading width		2,300	7'7"	2,300	7'7"	2,300	7'5"
Internal width		1,500	4'11"	1,500	4'11"	1,500	4'11"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

DUO - TANDEM

Vertical Beater Muck Spreader

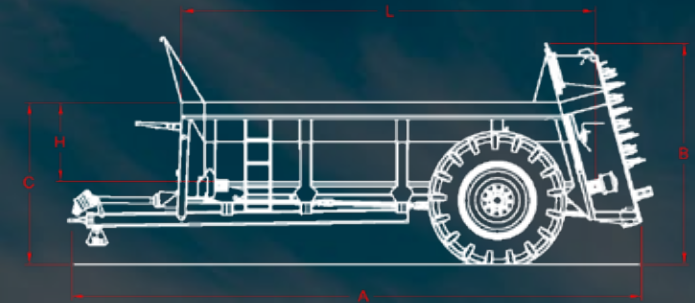

KEY FEATURES

- Advanced rotor design with open, dynamically balanced flights and unique stepped structure for increased strength.
- Enhanced rotor speeds: Mk5 at 417rpm, Mk6 at 386rpm.
- Larger bottom spinner paddles for extended spreading widths.
- Wide 1700mm beater set with 1050mm diameter spinning paddles (MK6) for precise material broadcast.
- Hardened boron steel rotor teeth with M16 bolts for durability.
- High-efficiency single-piece Rogelberg rotor gearbox.
- Standard wide-angle front PTO shaft.
- Robust 150mm square commercial axles.
- Effective 420 x 180mm S-Cam brakes with 25 – 35mm cylinders.
- Flared body sides for greater capacity and “easy out” design for improved loading and flow.
- 4 x 14mm marine grade floor chains with closely spaced slats for durability.
- 6 tooth floor drive sprockets for extended life.
- Versatile bolt-on fixed hitch, easily interchangeable.
- Optional sprung drawbar with robust 180mm, 12mm thick box section construction for strength and manoeuvrability.
- Single piece body panels for enhanced strength.
- High-quality finish with shot blasting and 130-micron 2-pack paint..

SPECIFICATIONS

	MODEL			
	Duo 120T	Duo 135T	Duo 175T HD	Duo 195T HD
Maximum Carrying Capacity (kg)	11,500	12,500	18,500	20,000
Volume - Level filled (m³)	8.2	9.3	12.8	14.0
Volume - Heaped without ext. (m³)	12.0	13.5	17.6	19.3
Volume - Max. heaped (m³)	15.7	17.5	21.9	23.9
Axle beam (mm)	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	560 / 60 R22.5	560 / 60 R22.5	560 / 60 R22.5	560 / 60 R22.5
No. of floor chains / chain size (mm)	4 / 14	4 / 14	4 / 14	4 / 14
Rear floor drive roller diameter (mm)	55	55	60	60
PTO input speed (rpm)	540	540	1000	1000
Power requirement (hp)	105	115	140	160
Unladen weight (kg)	5,420	5,870	6,580	7,110


DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	6,980	22'11"	7,580	24' 10"	7,650	25'1"	8,150	26'9"
Overall height	B	2,980	9'9"	3,015	9' 11"	3,340	10'11"	3,340	10'11"
Loading height	C	2,115	6'11"	2,150	7' 1"	2,470	8'1"	2,470	8'1"
Internal length	L	4,900	16'1"	5,500	18' 1"	5,595	18'4"	6,095	20'0"
Internal height	H	1,050	3'5"	1,050	3' 5"	1,350	4'5"	1,350	4'5"
Overall width		2,660	8'9"	2,820	9' 3"	2,880	9'5"	2,880	9'5"
Loading width		2,100	6'11"	2,100	6' 11"	2,300	7'7"	2,300	7'5"
Internal width		1,500	4'11"	1,500	4' 11"	1,500	4'11"	1,500	4'11"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

EVO

Vertical Beater Muck Spreader

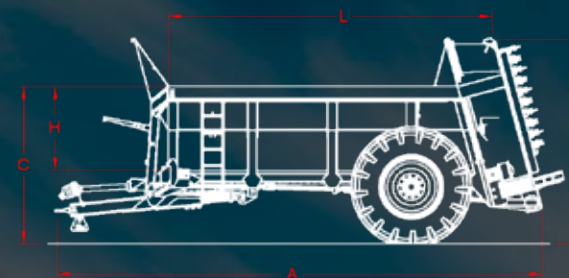

KEY FEATURES

- 965mm diameter rotors for enhanced shredding efficiency.
- Spreader paddles (1,250mm diameter) enable up to 20m wide spread patterns.
- Rotor speed exceeds 40mph, ensuring fine shredding.
- 1800mm beaters with 10mm flights for effective spreading across various materials.
- Durable Hardox rotor base with hardened boron teeth and paddles.
- Easy-load, flared body construction optimizes carrying capacity and maintains transport width.
- Superior running gear with 150mm square axles and 420 x 180 mm S-Cam brakes.
- Standard features: Hydraulic slurry door, torque limiting clutch, wide-angle PTO shaft, LED lights.
- High capacity design with flared body sides.
- 4 x 16mm floor chains reduce wear and stress on the drive.
- 6 tooth sprockets for minimized wear and enhanced chain contact.
- Robust 75mm floor drive shafts.
- 1600mm body width with flared sides and lowered front for better load visibility.
- Monocoque body allows larger tyres without increasing width.
- High-quality, durable 130-micron two-pack paint finish.

SPECIFICATIONS

	MODEL						
	Evo 180	Evo 200	Evo 220	Evo 180T	Evo 200T	Evo 220T	Evo 2200HD**
Maximum Carrying Capacity (kg)	18,000	20,000	22,000	18,000	20,000	22,000	24,000
Volume - Level filled (m³)	13.9	15.2	16.5	13.9	15.2	16.5	19.0
Volume - Heaped without ext. (m³)	18.3	20.1	21.8	18.3	20.1	21.8	25.4
Volume - Max. heaped (m³)	22.6	24.7	26.9	22.6	24.7	26.9	29.7
Axle beam (mm)	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	580 / 70 R38	580 / 70 R38	580 / 70 R38	560 / 60 R22.5	560 / 60 R22.5	560 / 60 R22.5	710 / 50 R26.5
No. of floor chains / chain size (mm)	4 / 16	4 / 16	4 / 16	4 / 16	4 / 16	4 / 16	4 / 16
Rear floor drive roller diameter (mm)	75	75	75	75	75	75	75
PTO input speed (rpm)	1,000	1,000	1,000	1,000	1,000	1,000	1,000
Power requirement (hp)	135	150	165	135	150	165	200
Unladen weight (kg)	6,950	7,250	7,550	7,750	8,050	8,350	9,300

**Includes sprung drawbar and steering axle as standard.


DIMENSIONS

		mm		ft		mm		ft		mm		ft		mm		ft	
		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	7,770	25' 6"	8,270	27' 1"	8,770	28' 9"	7,770	25' 6"	8,270	27' 1"	8,770	28' 9"	8,775	28' 9"		
Overall height	B	3,295	10' 9"	3,295	10' 9"	3,345	10' 11"	3,295	10' 9"	3,295	10' 9"	3,345	10' 11"	3,800	12' 5"		
Loading height	C	2,460	8' 1"	2,460	8' 1"	2,530	8' 3"	2,460	8' 1"	2,460	8' 1"	2,530	8' 3"	3,075	11' 8"		
Internal length	L	5,550	18' 3"	6,050	19' 10"	6,550	21' 5"	5,550	18' 3"	6,050	19' 10"	6,550	21' 5"	6,550	21' 5"		
Internal height	H	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"		
Overall width		2,920	9' 7"	2,920	9' 7"	3,000	9' 10"	2,920	9' 7"	2,920	9' 7"	3,000	9' 10"	3,010	9' 10"		
Loading width		2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,700	8' 10"		
Internal width		1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	2,000	6' 6"		

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

BIO

Horizontal Beater Muck Spreader

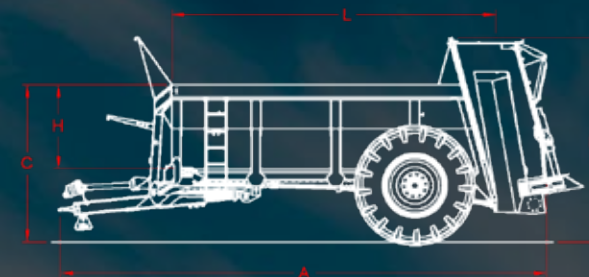

KEY FEATURES

- Twin horizontal beaters with dynamic balance and durable Hardox teeth.
- 2 large 1100mm diameter spreader discs, adjustable for up to 30m spread pattern.
- 1800mm horizontal beaters prevent funneling and bridging of material.
- Hardened boron teeth and spinner paddles for enhanced durability.
- Easy-service hydraulic rear canopy, sprung loaded, adjustable and rubber lined.
- Sturdy 150mm square commercial axles.
- Effective 420 x 180mm S-Cam brakes with 35mm cylinders.
- Standard features include hydraulic slurry door, torque limiting slip clutch, wide-angle PTO shaft.
- Shaft and gearbox-driven beaters with separate clutch protection for reliability.
- 4 x 16mm floor chains and 6 tooth sprockets for reduced wear and stress. (120 & 135 - 4 x 14mm floor chains).
- Robust 75mm diameter floor drive shafts.
- 1600mm body width with maximum flare and lowered front bin lip for improved visibility. (120 & 135 - 1500mm body width).
- “Easy out” flared body construction for efficient loading and transport.
- Quality finish with shot blasted preparation and 130-micron two-pack paint.

SPECIFICATIONS

	MODEL					
	Bio 120	Bio 135	Bio 160	Bio 180	Bio 200	Bio 220
Maximum Carrying Capacity (kg)	11,500	12,500	16,000	18,000	20,000	22,000
Volume - Level filled (m³)	8.2	9.3	11.8	13.4	14.6	15.9
Volume - Heaped without ext. (m³)	12.0	13.5	15.7	17.8	19.5	21.2
Volume - Max. heaped (m³)	15.5	17.5	19.4	22.0	24.2	26.3
Axle beam (mm)	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150	1 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	580 / 70 R38	580 / 70 R38	580 / 70 R38	580 / 70 R38	580 / 70 R38	580 / 70 R38
No. of floor chains / chain size (mm)	4 / 14	4 / 14	4 / 16	4 / 16	4 / 16	4 / 16
Rear floor drive roller diameter (mm)	60	60	75	75	75	75
PTO input speed (rpm)	1,000	1,000	1,000	1,000	1,000	1,000
Power requirement (hp)	110	120	130	140	160	180
Unladen weight (kg)	5,360	5,810	6,550	6,950	7,250	7,550


DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	6,980	22' 11"	7,580	24' 10"	7,170	23' 6"	7,770	25' 6"	8,270	27' 1"	8,770	28' 9"
Overall height	B	2,980	9' 9"	3,015	9' 11"	3,295	10' 9"	3,295	10' 9"	3,295	10' 9"	3,345	10' 11"
Loading height	C	2,115	6' 11"	2,150	7' 1"	2,460	8' 1"	2,460	8' 1"	2,460	8' 1"	2,530	8' 3"
Internal length	L	4,900	16' 1"	5,500	18' 1"	4,950	16' 3"	5,550	18' 3"	6,050	19' 10"	6,550	21' 5"
Internal height	H	1,050	3' 5"	1,050	3' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"
Overall width		2,660	8' 9"	2,820	9' 3"	2,920	9' 7"	2,920	9' 7"	2,920	9' 7"	3,000	9' 10"
Loading width		2,100	6' 11"	2,100	6' 11"	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"
Internal width		1,500	4' 11"	1,500	4' 11"	1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	1,600	5' 3"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

BIO

Horizontal Beater Muck Spreader

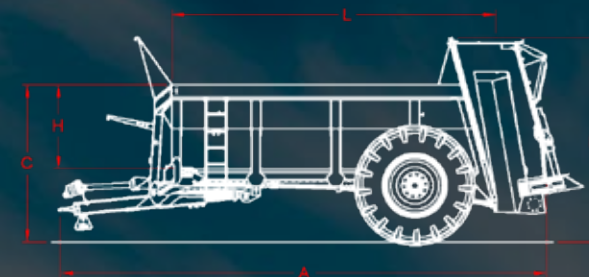

KEY FEATURES

- Twin horizontal beaters with dynamic balance and durable Hardox teeth.
- 2 large 1100mm diameter spreader discs, adjustable for up to 30m spread pattern.
- 1800mm horizontal beaters prevent funneling and bridging of material.
- Hardened boron teeth and spinner paddles for enhanced durability.
- Easy-service hydraulic rear canopy, sprung loaded and rubber lined.
- Sturdy 150mm square commercial axles.
- Effective 420 x 180mm S-Cam brakes with 35mm cylinders.
- Standard features include hydraulic slurry door, torque limiting slip clutch, wide-angle PTO shaft, and in-cab electric floor speed control.
- Shaft and gearbox-driven beaters with separate clutch protection for reliability.
- 4 x 16mm floor chains and 6 tooth sprockets for reduced wear and stress.
- Robust 75mm diameter floor drive shafts.
- 1600mm body width with maximum flare and lowered front bin lip for improved visibility. (120 & 135 - 1500mm body width).
- Monocoque body design allows for larger tyres without wider transport width.
- "Easy out" flared body construction for efficient loading and transport.
- Quality finish with shot blasted preparation and 130-micron two-pack paint.

BIO Horizontal Beater Muck Spreader

SPECIFICATIONS

	MODEL			
	Bio 180T	Bio 200T	Bio 220T	Bio 2220 HD**
Maximum Carrying Capacity (kg)	18,000	20,000	22,000	24,000
Volume - Level filled (m³)	13.4	14.6	15.9	18.3
Volume - Heaped without ext. (m³)	17.8	19.5	21.2	24.8
Volume - Max. heaped (m³)	22.0	24.2	26.3	29.7
Axle beam (mm)	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150	2 x 150 x 150
No. of axle studs / brake size (mm)	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180	10 / 420 x 180
Standard wheels	560 / 60 R22.5	560 / 60 R22.5	560 / 60 R22.5	710 / 50 R26.5
No. of floor chains / chain size (mm)	4 / 16	4 / 16	4 / 16	4 / 16
Rear floor drive roller diameter (mm)	75	75	75	75
PTO input speed (rpm)	1,000	1,000	1,000	1,000
Power requirement (hp)	140	160	180	200
Unladen weight (kg)	8,250	8,550	8,850	9,800

**Includes sprung drawbar and steering axle as standard.

DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	7,770	25' 6"	8,270	27' 1"	8,770	28' 9"	8,775	28' 9"
Overall height	B	3,295	10' 9"	3,295	10' 9"	3,345	10' 11"	3,800	12' 5"
Loading height	C	2,460	8' 1"	2,460	8' 1"	2,530	8' 3"	3,075	11' 8"
Internal length	L	5,550	18' 3"	6,050	19' 10"	6,550	21' 5"	6,550	21' 5"
Internal height	H	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"	1,350	4' 5"
Overall width		2,920	9' 7"	2,920	9' 7"	3,000	9' 10"	3,010	9' 10"
Loading width		2,300	7' 6"	2,300	7' 6"	2,300	7' 6"	2,700	8' 10"
Internal width		1,600	5' 3"	1,600	5' 3"	1,600	5' 3"	2,000	6' 6"

All capacities are approximate and based on in field use at 10km/h. It is the responsibility of the user to check the road legislation in their area.
To achieve max carrying capacity may require upgraded tyre equipment.
Specs are subject to change without prior notice.

OPTIONAL EXTRAS

	MODEL			
		DUO	EVO	BIO
Slurry door	✓	✓	Std.	Std.
Automatic slip clutch		✓	Std.	Std.
1,000 rpm rotor gearbox		✓	Std.	Std.
Electric in-cab bed speed control	✓	✓	Std.	Std.
Slurry door sight gauge		✓	✓	✓
Sprung drawbar		✓	✓	✓
Fixed removable drawbar		✓	✓	✓
K80 ball		✓	✓	✓
Steel 250 mm		✓	✓	✓
Steel 400 mm		✓	✓	✓
Steel 650 mm			✓	✓
Wooden 9"	✓	✓	✓	✓
Rear cone for hoods		✓	✓	
RDS app rate controller ISOCAN c/w weigh cells* - Single axle / ISOBUS lead		✓	✓	✓
RDS app rate controller ISOCAN c/w weigh cells* - Twin axle / ISOBUS lead			✓	✓

	MODEL			
		DUO	EVO	BIO
Weigh cell ready - Single axle*		✓	✓	✓
Weigh cell ready - Twin Axle*			✓	✓
Rear rotor canopy		✓	✓	
Compost windrow doors		✓	✓	
Mudguards		✓	✓	✓
Toolbox		✓	✓	✓
Rear flashing LED beacon	✓	✓	Std.	Std.
Air / hydraulic brakes		✓	✓	✓
Steering axle, per axle, 150mm			✓	✓
Wind up jack	✓	✓	✓	✓
Headland border control				✓
Rear hitch c/w 7 pin socket and brake connection	✓	✓	✓	✓
Work lights		✓	✓	✓

*Requires sprung drawbar
Std. = Comes as standard
✓ = Compatible


OPTIONAL EXTRAS Muck Spreaders

TYRE Prices per pair (£)

	LOAD RATING	Eco 65	Eco 75	Eco 85	Duo 80	Duo 105	Duo 120 Bio 120	Duo 135 Bio 135	Duo 150 Duo 155 HD	Bio 160	Duo 165 Duo 175 HD	Duo 180 Duo 195 HD	Evo 180 Bio 180	Evo 200 Bio 200	Evo 220 Bio 220
16.9 x 30		Std.	Std.												
18.4 x 34			✓	Std.											
420/85 R30				✓	Std.										
460/85 R38					✓	Std.	Std.								
520/70 R34					✓	✓	✓								
520/85 R38						✓	✓	Std.	Std.						
580/70 R38	A155					✓	✓	✓	✓	Std.	Std.				
580/70 R38	A180					✓	✓	✓	✓	✓	✓	Std.	Std.	Std.	Std.
650/65 R38 - Mitas AC65	166D/169A8					✓	✓	✓	✓	✓	✓				
650/65 R38 - Alliance 360	178A8/175B					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
VF 650/65 R42 - Alliance 365	174D									✓	✓	✓	✓	✓	✓
710/70 R38 - BKT RT765	166A8					✓	✓	✓	✓	✓	✓				
710/70 R38 - Alliance Agristar II	178D					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
710/70 R38 - BKT RT600	181A8/178D									✓	✓	✓	✓	✓	✓
710/70 R42 - Alliance Agristar II	173D									✓	✓	✓	✓	✓	✓
VF 710/70 R42 - Alliance Agriflex+ 372	185D									✓	✓	✓	✓	✓	✓

Ktwo hold the right to change the tyre manufacturer to a like for like spec or higher.

COLOUR OPTIONS*

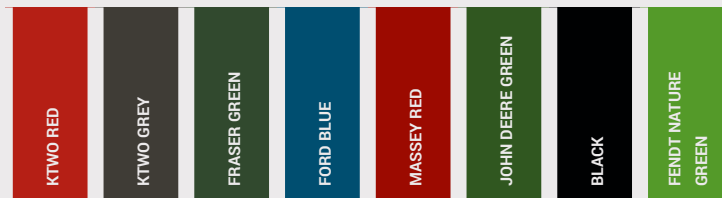

*Colour swatch is for illustrative purposes only and actual colour may differ slightly.

CURVE

Roadeo Curve Trailer



KEY FEATURES

- High quality and heavy duty trailer.
- Comprehensive LED lighting including twin rear clusters, side markers, and strobe beacon.
- Bolt-on guards for rear light units.
- Removable drawbar skid with convenient stowage.
- Front hose arm for easy stowage of hydraulic, air, and electrical lines.
- Durable RHS chassis construction.
- High tensile steel body panels for enhanced strength and reduced weight.
- Fully welded construction for robustness.
- Deep front arched viewing window for optimal loading visibility.
- Standard sprung drawbar on all models for smoother ride.
- Efficient mono tipping cylinders for quick tip and return.
- Folded high tensile steel panels from single sheets for extra strength.
- Hydraulic tailgate with safety valve and mechanical four-point locking.
- Protective mudguards and spray suppression flaps front and rear.
- Accessible front ladder.
- Robust 120mm square commercial axles.
- 10 stud 420 x 180 mm brake hubs for 50% braking efficiency.
- Parabolic sprung axles with 2000 mm track width for stability.
- Secure ratchet style handbrake.
- Produced in state-of-the-art manufacturing facilities.
- Quality finish with shot blasted preparation and 130-micron two-pack acrylic paint.



SPECIFICATIONS

	MODEL							
	1200	1400 COMPACT	1400	1600	1800	2000	2000 TRI AXLE	2400 TRI AXLE
Design capacity (kg)	12,000	14,000	14,000	16,000	18,000	20,000	20,000	24,000
Volume – Grain (m³)	16.8	19.0	19.0	21.4	24.2	26.6	26.6	31.0
Volume – Silage (m³)	29.5	31.7	33.3	35.7	40.3	44.3	44.3	52.4
Axle track width (mm)	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	3 x 120 x 120	3 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 42t	3 / 100 x Parabolic 42t
Tipping cylinders x capacity (l)	145 x 5 / 26.3	145 x 5 / 26.3	145 x 5 / 26.3	165 x 5 / 34.8	165 x 6 / 36.6	187 x 6 / 51.2	187 x 6 / 51.2	187 x 6 / 51.2
Floor thickness (mm)	5	5	5	5	5	5	5	5
Side thickness (mm)	4	4	4	4	4	4	4	4
Sprung drawbar	Std.	Std.	Std.	Std.	Std.	Std.	Std.	Std.
Front arch window	Std.	Std.	Std.	Std.	Std.	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.	Std.	Std.	Std.	Std.	Std.
Standard wheels	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5
Unladen weight – grain (kg)	5,340	5,445	5,685	5,845	6,200	7,645	8,095	9,895
Unladen weight – silage (kg)	5,690	5,795	6,085	6,245	6,650	8,145	8,595	10,395

DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	7,320	24'	7,340	24'	8,020	26'3"	8,020	26'3"	8,840	29'	9,520	31'2"	9,520	31'2"
Loading height - grain	B	2,545	8'4"	2,715	8'11"	2,678	8'9"	2,868	9'5"	2,868	9'5"	2,868	9'5"	2,868	9'5"
Loading height - silage	C	3,545	11'7"	3,715	12'2"	3,678	12'1"	3,868	12'8"	3,868	12'8"	3,868	12'8"	3,868	12'8"
Internal body length	L	5,500	18'1"	5,500	18'1"	6,200	20'4"	6,200	20'4"	7,000	23'0"	7,700	25'3"	7,700	25'3"
Internal body height - grain	H	1,330	4'4"	1,500	4'11"	1,330	4'4"	1,500	4'11"	1,500	4'11"	1,500	4'11"	1,500	4'11"
Tipped height - grain	D	6,335	20'9"	6,445	21'1"	6,990	22'11"	7,110	23'4"	7,750	25'5"	8,245	27'0"	8,245	27'0"
Tipped height - silage	E	6,910	22'8"	7,020	23'0"	7,565	24'10"	7,685	25'2"	8,325	27'4"	8,820	28'11"	8,820	28'11"
Average internal width		2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"	2,300	7'6"
Maximum external width		2,640	8'8"	2,640	8'8"	2,640	8'8"	2,640	8'8"	2,640	8'8"	2,640	8'8"	2,640	8'8"

Specs are subject to change without prior notice.

ROOT

Roadeo Root Trailer



KEY FEATURES

- High quality and heavy-duty trailer designed to handle root crops as well as being a versatile trailer.
- Comprehensive LED lighting including twin rear clusters, side markers, and strobe beacon.
- Bolt-on guards for rear light units.
- Removable drawbar skid with convenient stowage.
- Front hose arm for easy stowage of hydraulic, air, and electrical lines.
- Durable RHS chassis construction.
- High tensile steel body panels for enhanced strength and reduced weight.
- Fully welded construction for robustness.
- Deep front arched viewing window for optimal loading visibility.
- Standard sprung drawbar on all models for smoother ride.
- Efficient mono tipping cylinders for quick tip and return.
- Folded high tensile steel panels from single sheets for extra strength.
- Hydraulic tailgate with safety valve and mechanical four-point locking.
- Protective mudguards and spray suppression flaps front and rear.
- Accessible front ladder.
- Robust 120mm square commercial axles.
- 10 stud 420 x 180 mm brake hubs for 50% braking efficiency.
- Parabolic sprung axles with 2000 mm track width for stability.
- Secure ratchet style handbrake.
- Produced in state-of-the-art manufacturing facilities.
- Quality finish with shot blasted preparation and 130-micron two-pack acrylic paint.



SPECIFICATIONS

	MODEL		
	1400	1600	1800
Design capacity (kg)	14,000	16,000	18,000
Volume – Grain (m³)	18.5	20.4	22.2
Volume – Silage (m³)	32.8	34.7	38.3
Axle track width (mm)	2,000	2,000	2,000
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t
Tipping cylinders x capacity (l)	165 x 6 / 36.6	165 x 6 / 36.6	165 x 6 / 36.6
Floor thickness (mm)	5	5	5
Side thickness (mm)	4	4	4
Sprung drawbar	Std.	Std.	Std.
Front arch window	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.
Standard wheels	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5
Unladen weight – grain (kg)	6,495	6,850	7,205
Unladen weight – silage (kg)	6,985	7,350	7,715

DIMENSIONS

		mm	ft		mm	ft		mm	ft
Overall length	A	8,820	26'3"		9,520	31'2"		10,220	33'5"
Loading height - grain	B	2,450	8'		2,450	8'		2,450	8'
Loading height - silage	C	3,450	11'4"		3,450	11'4"		3,450	11'4"
Internal body length	L	7,000	23'		7,700	25'3"		8,400	27'6"
Internal body height - grain	H	1,150	3'9"		1,150	3'9"		1,150	3'9"
Tipped height - grain	D	7,110	23'3"		7,750	25'5"		8,390	27'5"
Tipped height - silage	E	7,670	25'2"		8,310	27'3"		8,950	29'4"
Average internal width		2,300	7'6"		2,300	7'6"		2,300	7'6"
Maximum external width		2,640	8'8"		2,640	8'8"		2,640	8'8"

Specs are subject to change without prior notice.

COMPACT & PUSH

Rodeo Compact & Push Trailer

No. 1 UK COMPACTOR TRAILER



KEY FEATURES

- UK Leading Compactor Trailer.
- Unique combination of moving floor and headboard for unloading, ideal for low buildings and sloping sites.
- Rapid unloading without the need for tipping, enhancing turnaround time.
- Compress goods with moving headboard for up to 50% extra capacity.
- Slotted front headboard with glazed polycarbonate windows for superior visibility.
- Fully sealed pusher system, suitable for a diverse range of materials.
- Efficient single stage double acting cylinders, reducing oil requirements.
- High tensile, single sheet steel body panels for added strength and rigidity.
- Hydraulic tailgate with open/closed indicator and secure four-point locking.
- Protective mudguards and spray suppression flaps front and rear.
- Comprehensive LED lighting system including rear light clusters, high tailgate repeaters, side markers, and beacon.
- Durable RHS chassis and lower net weight for combined body and chassis.
- Enhanced stability, especially on uneven terrain, thanks to a low centre of gravity.
- Quality finish with shot blasted preparation and 130-micron two-pack acrylic paint.
- Commercial grade 120mm square axles with 10 stud hubs.
- 420 x 180mm brakes for 50% braking efficiency.
- Parabolic sprung axles with 2000mm track width for maximum stability.
- Ratchet style handbrake for secure parking.
- Versatile sprung drawbar with a bolt-on GKN hitch, accommodating fixed, swivel, and K80 spoon options.

ROADEO COMPACT & PUSH Trailer

SPECIFICATIONS

	MODEL					
	1800 LOW	1800	2000 LOW	2000	2500 LOW	2500
Design capacity (kg)	16,000	18,000	18,000	20,000	22,000	25,000
Volume – Cargo (m³)	21.0	29.0	23.8	32.5	29.1	39.1
Volume – Silage (m³)	28.3	35.0	32.1	39.5	36.1	47.7
Max. silage vol. with compression (m³)	42.5	52.5	48.1	59.3	54.1	71.6
Axle track width (mm)	2,000	2,000	2,000	2,000	2,000	2,000
Suspension arrangement	Tandem	Tandem	Tandem	Tandem	Tridem	Tridem
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	3 x 120 x 120	3 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 42t
Sprung drawbar	Std.	Std.	Std.	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.	Std.	Std.	Std.
Standard wheels	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5
Basic unladen weight (kg)	5,465	6,520	7,130	8,125	9,250	10,505

DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	7,870	25'10"	7,870	25'10"	8,670	28'5"	8,670	28'5"	10,070	33'1"	10,070	33'1"
Overall height - cargo	B	2,915*	9'7"*	3,370*	11'1"*	3,055**	10'*	3,510**	11'6"*	2,915*	9'7"*	3,370*	11'1"*
Overall height - silage	C	3,415*	11'2"*	3,870*	12'8"*	3,555**	11'8"*	4,010**	13'2"*	3,415*	11'2"*	3,870*	12'8"*
Internal body length	L	6,200	20'4"	6,200	20'4"	7,000	23'0"	7,000	23'0"	8,400	27'7"	8,400	27'7"
Internal body height	H	1,555	5'1"	2,010	6'7"	1,555	5'1"	2,010	6'7"	1,555	5'1"	2,010	6'7"
Max height - tailgate open	D	3,830	12'7"	4,285	14'0"	3,970	13'	4,425	14'6"	3,830	12'7"	4,285	14'0"
Average internal body width		2,380	7'10"	2,380	7'10"	2,380	7'10"	2,380	7'10"	2,380	7'10"	2,380	7'10"
Max external width		2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"


*Heights based on 560/60 R22.5 wheel equipment

**Heights based on 650/55 R26.5 wheel equipment

Specs are subject to change without prior notice.

DUMPER

Roadeo Dump Trailers

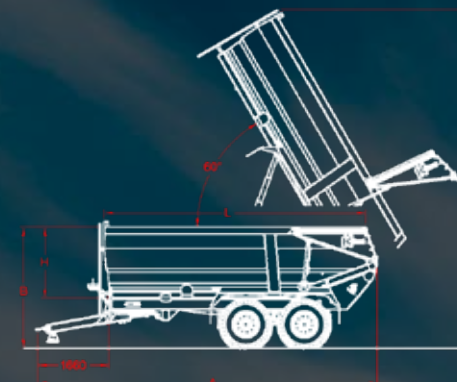

KEY FEATURES

- High quality and heavy-duty trailer.
- Comprehensive LED lighting, including twin rear clusters, side markers, and strobe beacon.
- Protective bolt-on guards for rear light units.
- Removable drawbar skid with dedicated stowage.
- Front hose arm for organized stowage of hydraulic, air, and electrical lines.
- Robust heavy-duty RHS chassis construction.
- Body panels made from high tensile steel for enhanced strength and reduced weight.
- Fully welded construction for maximum durability.
- Deep front arched windows on all models for excellent loading visibility.
- Sprung drawbars on all models, ensuring a smoother ride.
- Efficient mono tipping cylinders for quick tipping with rapid reset.
- Body panels from single-sheet, high tensile steel for superior strength.
- Hydraulic tailgate with safety valve and mechanical four-point locking.
- Mudguards and spray suppression flaps at both ends.
- Accessible front ladder for ease of use.
- Commercial-grade 120mm square axles.
- 10 stud 420 x 180 mm brake hubs for 50% braking efficiency.
- Parabolic leaf sprung axles with 2000mm track for optimal stability.
- Secure ratchet style handbrake.
- Crafted in state-of-the-art manufacturing facilities.
- Premium finish with shot-blasted preparation and 130-micron two-pack acrylic paint.
- High rear tipping pivot point for effective unloading.
- 6mm thick floor and 4mm side panels for robustness.
- High 60-degree tipping angle for efficient unloading.

SPECIFICATIONS

	MODEL	
	DT 1400	DT 1600
Design capacity (kg)	14,000	16,000
Volume – Cargo (m³)	17.1	18.8
Axle track width (mm)	2,000	2,000
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120
Brake size (mm)	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t
Tipping cylinders x capacity (l)	145 x 5 / 26.3	165 x 5 / 34.8
Floor thickness (mm)	6	6
Side sheet thickness (mm)	4	4
Sprung drawbar	Std.	Std.
Fixed hitch	Std.	Std.
Standard wheels	385 / 65 R22.5	385 / 65 R22.5
Unladen weight (kg)	6,300	6,600

DIMENSIONS

		mm	ft	mm	ft
Overall length	A	7,400	24'3"	7,900	25'9"
Loading height*	B	2,830	9'3"	2,830	9'3"
Internal body length	L	5,700	18'7"	6,200	20'3"
Internal body height	H	1,500	4'9"	1,500	4'9"
Tipped height*	D	7,510	24'6"	7,790	25'6"
Average internal width		2,300	7'5"	2,300	7'5"
Maximum external width		2,640	8'7"	2,640	8'7"

*Heights based on 560/60 R22.5 wheel equipment
Specs are subject to change without prior notice.

CONTRACTOR

Roadeo Contractor Dump Trailers



KEY FEATURES

- High quality and heavy-duty trailer.
- All-around LED lighting including twin rear clusters, side markers, and a strobe beacon for enhanced visibility.
- Bolt-on guards for rear light units for added protection.
- Convenient removable drawbar skid with a designated storage point.
- A front hose arm for organized storage of hydraulic, air, and electrical lines.
- Durable, heavy-duty RHS chassis for longevity and strength.
- Body panels crafted from high tensile steel for increased strength and reduced net weight.
- Fully welded construction ensuring robustness and durability.
- Sprung drawbars on all models to enhance the ride quality.
- Efficient mono tipping cylinders for quick and effective tipping with rapid reset.
- Body panels made from single-sheet, high tensile steel for extra strength.
- Hydraulic tailgate equipped with a hydraulic safety valve and mechanical four-point locking.
- Mudguards and spray suppression flaps at both the front and rear.
- Commercial-grade 120mm square axles.
- 10 stud 420 x 180 mm brake hubs designed for 50% braking efficiency.
- Parabolic sprung axles with a 2,000 mm track width for optimal stability.
- Secure ratchet style handbrake.
- Manufactured in modern facilities with high-quality standards.
- Surface preparation includes shot blasting, followed by a finish with 130 microns of two-pack acrylic paint.
- Square body design to maximize capacity and facilitate cleaning.
- High tipping angle of 60 degrees for efficient unloading.
- Floor thickness options of 8 or 10mm (for 14T&18T, 20T models respectively).
- Side thickness options of 6 or 8mm (for 14T&18T, 20T models respectively).

ROADEO CONTRACTOR Trailer

SPECIFICATIONS

	MODEL		
	CT 1400	CT 1800	CT 2000
Design capacity (kg)	14,000	18,000	20,000
Volume – Cargo (m³)	10.5	10.5	11.5
Axle track width (mm)	2,000	2,000	2,000
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t
Tipping cylinders x capacity (l)	145 x 5 / 26.3	165 x 5 / 34.8	165 x 6 / 36.6
Floor thickness (mm)	8	8	10
Side sheet thickness (mm)	6	6	8
Sprung drawbar	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.
Standard wheels	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5
Unladen weight (kg)	5,800	5,800	6,600

DIMENSIONS

		mm	ft	mm	ft	mm	ft
Overall length	A	6,875	22'7"	6,875	22'7"	7,250	23'9"
Loading height	B	2,250*	7'5"*	2,250*	7'5"*	2,330**	7'8"*
Internal body length	L	5,000	16'5"	5,000	16'5"	5,400	17'9"
Internal body height	H	900	2'11"	900	2'11"	900	2'11"
Tipped height		6,280*	20'7"*	6,280*	20'7"*	6,785**	22'3"*
Average internal width		2,300	7'6"	2,300	7'6"	2,300	7'6"
Maximum external width		2,640	8'8"	2,640	8'8"	2,640	8'8"


*Heights based on 560/60 R22.5 wheel equipment

**Heights based on 650/55 R26.5 wheel equipment

Specs are subject to change without prior notice.

LOW LOADER

Rodeo Low Loader

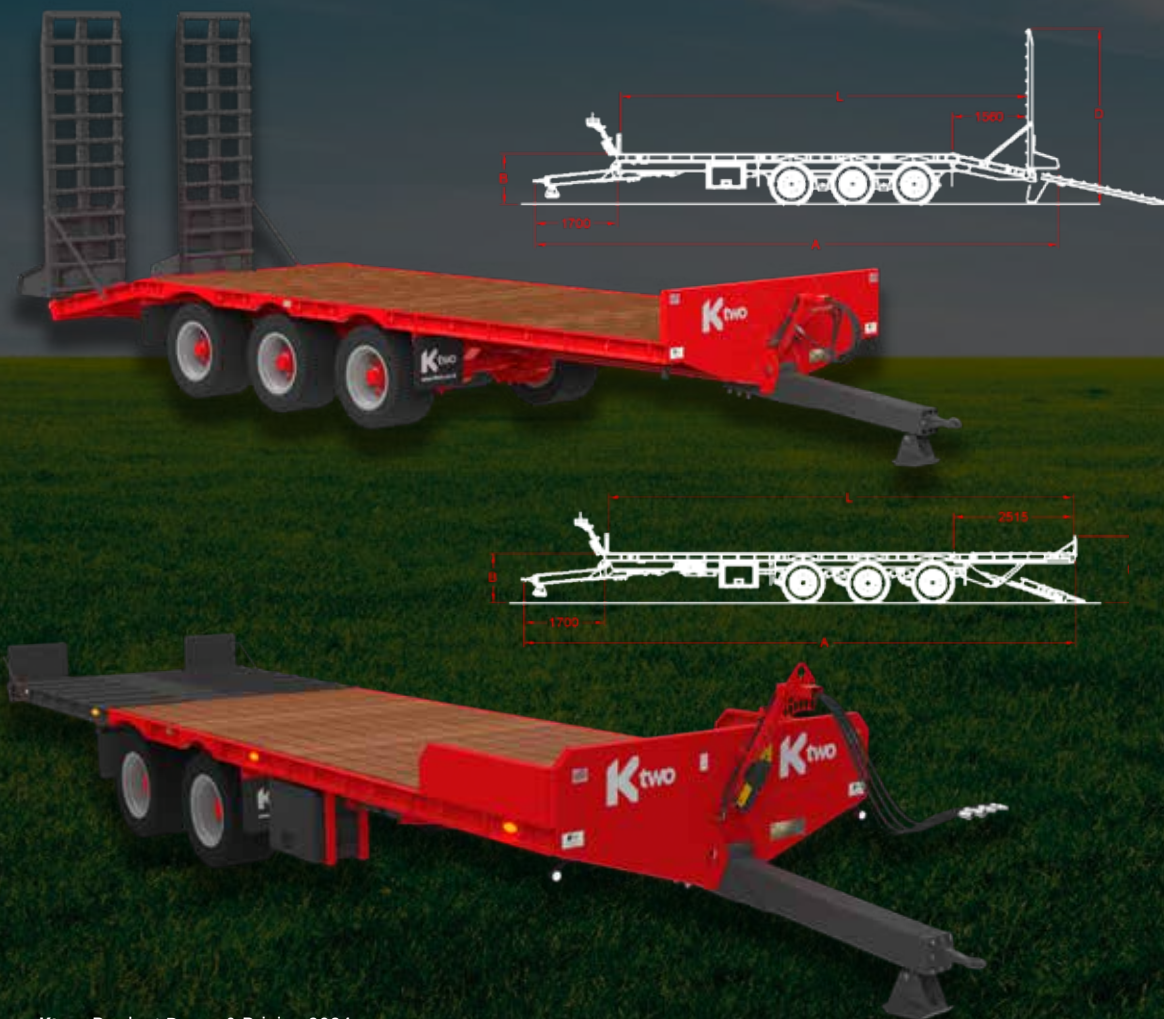

KEY FEATURES

- Heavy duty chassis ensuring robust support and longevity.
- Optimally positioned running gear to enhance manoeuvrability, making handling easier in various conditions.
- Durable 6mm checker plate floor on the beavertail, providing strength and stability for carried loads.
- Comprehensive LED lighting system including twin rear light clusters, side markers, and a flashing beacon, ensuring high visibility and safety.
- Removable drawbar skid with a storage point, adding to the convenience and functionality.
- Mudguards and spray suppression flaps at both front and rear, minimizing road debris and spray impact.
- Commercial-grade 120mm square axles supporting heavy loads.
- 10 stud 420 x 180 mm brake hubs for optimal braking efficiency (50%).
- Multi leaf sprung axles (Fixed Beavertail) and Parabolic leaf sprung axles (Hydraulic Beavertail), both with 2000mm track width for maximum stability.
- Ratchet style handbrake for reliable stationary security.
- High-quality paint finish (shot blasted preparation and 130 microns of two-pack acrylic paint) for durability and aesthetics.
- Sturdy 50mm hardwood floor, supporting heavy and rugged use.
- Hydraulic folding rear ramps in the Fixed Beavertail and Hydraulic lowering folding beavertail with removable ramps in the Hydraulic Beavertail, offering versatility in loading.
- Low ride height for improved stability and ease of loading.
- Rolled steel angle side channel for easy attachment of strap hooks & chains, enhancing load security.
- RHS floor bearers spaced at regular intervals (340mm) for structural integrity.
- Rope hooks and chain lashing bars on 8mm side rails, offering additional securing options.
- Standard strap/toolbox included for convenient stowage of chains and other tools.

ROADEO LOW LOADER Trailer

SPECIFICATIONS

	MODEL			
	LL 28 FIXED BEAVERTAIL	LL 28 TRI AXLE FIXED BEAVERTAIL	LL 28 HYDRAULIC BEAVERTAIL	LL 32 TRI AXLE HYDRAULIC BEAVERTAIL
Design capacity (kg)	18,000	25,000	18,000	25,000
Axle track width (mm)	2,000	2,000	2,000	2,000
Axle beam (mm)	2 x 120 x 120	3 x 120 x 120	2 x 120 x 120	3 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	6 x 100 x 21t	6 x 100 x 21t	3 x 100 x Parabolic 32T	3 x 100 x Parabolic 32T
Floor material	Keruing	Keruing	Keruing	Keruing
Floor thickness (mm)	50	50	50	50
Floor bearer size (mm)	100 x 50 x 5	100 x 50 x 5	100 x 50 x 5	100 x 50 x 5
Floor bearer spacing (mm)	340	340	340	340
Chassis size (mm)	203 x 203 x 46	203 x 203 x 46	203 x 203 x 46	203 x 203 x 46
Standard wheels	445 / 45 R19.5	445 / 45 R19.5	445 / 45 R19.5	445 / 45 R19.5
Sprung drawbar	Std.	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.	Std.
Unladen weight (kg)	5,650	6,000	5,650	6,000

DIMENSIONS

		mm		ft		mm		ft		mm		ft	
Overall length	A	10,825	35'6"	10,825	35'6"	10,365	34'0"	11,565	37'11"				
Loading height	B	1,040	3'5"	1,040	3'5"	1,040	3'5"	1,040	3'5"				
Bed length	L	8,500	27'11"	8,500	27'11"	8,600	28'3"	9,800	32'2"				
Ramp height	D	3,640	11'11"	3,640	11'11"	1,400	4'7"	1,400	4'7"				
Bed width		2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"				

Specs are subject to change without prior notice.

FLATBED

Rodeo Flatbed



Bale Clamp Optional Extra
Available for 2024!

KEY FEATURES

- High quality and heavy-duty flatbed trailer.
- Heavy duty universal beam chassis, offering unmatched durability and strength.
- Choice between fixed or sprung drawbar, catering to different towing needs and preferences.
- Running gear strategically placed to enhance manoeuvrability.
- Robust 4.5mm checker plate flooring, ensuring durability and grip.
- Rolled steel angle side channel, facilitating easy attachment of strap hooks.
- RHS floor bearers evenly spaced at 400mm, adding to the structural integrity.
- Welded rope hooks on floor bearers for secure load tying.
- Low ride height design, maximizing load height capacity.
- Comprehensive LED lighting system, including twin rear light clusters, side markers, and a flashing beacon for optimal visibility.
- Protective bolt-on guards for rear light units.
- Removable drawbar skid with a convenient storage point.
- Mudguards and spray suppression flaps at both front and rear.
- Commercial-grade 120mm square axles.
- 10 stud 420 x 180 mm brake hubs designed for 50% braking efficiency.
- Parabolic leaf sprung axles with a 2000mm track width, ensuring maximum stability.
- Practical ratchet style handbrake.
- Shot blasted paint preparation for a long-lasting finish.
- Coated with 130 microns of high-quality two-pack acrylic paint.

ROADEO FLATBED Trailer

SPECIFICATIONS

	MODEL					
	FB 26	FB 28	FB 30	FB 32	FB 40	FB 44
Design capacity (kg)	14,000	14,000	16,000	16,000	17,000	18,000
Axle track width (mm)	2,000	2,000	2,000	2,000	2,000	2,000
Axle beam (mm)	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	2 x 120 x 120	3 x 120 x 120	3 x 120 x 120
Brake size (mm)	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180	420 x 180
Axle springs – no. of leaves / leaf size (mm)	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 32t	3 / 100 x Parabolic 42t	3 / 100 x Parabolic 42t
Floor material	Checker plate	Checker plate	Checker plate	Checker plate	Checker plate	Checker plate
Floor thickness (mm)	3	3	3	3	3	3
Floor bearer size (mm)	60 x 40 x 4	60 x 40 x 4	60 x 40 x 4	60 x 40 x 4	60 x 40 x 4	60 x 40 x 4
Floor bearer spacing (mm)	420	420	420	420	420	420
Chassis size (mm)	203 x 133 x 30 column	203 x 133 x 30 column	203 x 203 x 46 column	203 x 203 x 46 column	203 x 203 x 46 column	203 x 203 x 46 column
Standard wheels	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5	385 / 65 R22.5
Sprung drawbar	Std.	Std.	Std.	Std.	Std.	Std.
Fixed hitch	Std.	Std.	Std.	Std.	Std.	Std.
Harvest ladders	Std.	Std.	Std.	Std.	Std.	Std.
Unladen weight (kg)	4,045	4,125	4,340	4,555	6,100	6,200

DIMENSIONS

		mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Overall length	A	9,740	32'0"	10,340	33'9"	10,940	35'9"	11,540	37'9"	14,234	46'7"	15,440	50'7"
Loading height 445/45 R19.5C	B	1,040	3'4"	1,040	3'4"	1,040	3'4"	1,040	3'4"	-	-	-	-
Loading height 385/65 R22.5C	B	1,175	3'9"	1,175	3'9"	1,175	3'9"	1,175	3'9"	-	-	-	-
Bed length	L	7,950	26'1"	8,550	28'1"	9,150	30'0"	9,750	32'0"	12,192	40'0"	13,411	44'0"
Ladder height	D	2,000	6'6"	2,000	6'6"	2,000	6'6"	2,000	6'6"	2,000	6'6"	2,000	6'6"
Bed width		2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"	2,550	8'4"

Specs are subject to change without prior notice.

OPTIONAL EXTRAS

	MODEL						
	CURVE	ROOT	COMPACT & PUSH	DUMPER	CONTRACTOR	LOW LOADER	FLATBED
Air / hydraulic brakes c/w air load sensing	✓	✓	✓	✓	✓	✓	✓
Air only spring brakes in lieu of hydraulic c/w load sensing	✓	✓	✓	✓	✓	✓	✓
A.B.S.	✓	✓	✓	✓	✓	✓	✓
Hydraulic brake load sensing valve	✓	✓	✓	✓	✓	✓	✓
Hydraulic transcover system	✓	✓	✓	✓	✓		
Swivel hitch / K80 hitch	✓	✓	✓	✓	✓	✓	✓
Front viewing platform	✓	✓					
Steering axle, active	✓	✓	✓		✓	✓	
Steering rear axle, passive	✓	✓	✓		✓	✓	
Strap box	✓	✓	✓	✓	✓	✓	✓
Work lights (pair)	✓	✓	✓	✓	✓	✓	✓
Hydraulic jack	✓	✓	✓	✓	✓	✓	✓
Manual pump for jack	✓	✓	✓	✓	✓	✓	✓
Under run bars (side)	✓	✓	✓	✓	✓	✓	✓
Rear towing eye	✓	✓	✓	✓	✓		✓
Air suspension - Twin / Tri	✓	✓	✓	✓	✓	✓	✓
Bale wedge						✓	
Hi Vis Tape	✓	✓	✓	✓	✓	✓	✓
K80 rear towing kit	✓	✓	✓	✓	✓		
Weigh cells			✓				

	MODEL						
	CURVE	ROOT	COMPACT & PUSH	DUMPER	CONTRACTOR	LOW LOADER	FLATBED
Silage sides Roadeo 1200/1400C	✓						
Silage sides Roadeo 1400/1600/1800	✓	✓					
Silage sides Roadeo 2000	✓	✓					
Side blower board	✓	✓					
Rear blower board	✓	✓					
Silage extensions			✓				
Hydraulic fold down front silage extension			✓				
Manual grain roll over sheet	✓	✓					
Hydraulic grain roll over sheet	✓	✓					
Silage side lift off frame	✓	✓					
Grain chute	✓	✓	✓				
Rear hitch c/w 7 pin socket and brake connection - Fixed / Swing	✓	✓	✓	✓	✓		✓
Reverse light c/w tipping switch	✓	✓	✓				
Long front mud flaps	✓	✓	✓	✓	✓		✓
Grain sock	✓	✓	✓				
Hydraulic weigh system	✓	✓		✓	✓		
Swing up trailer stand	✓	✓	✓	✓	✓	✓	✓
Bale Clamp							✓
Fixed drawbar							✓

✓ = Compatible

OPTIONAL EXTRAS Trailers

TYRE Prices per wheel (£)

	LOAD RATING	MODEL						
		CURVE	ROOT	COMPACT & PUSH	DUMPER	CONTRACTOR	LOW LOADER	FLATBED
710/50 R26.5 - Alliance 882	172D	✓	✓	✓				
650/55 R26.5 - Mitas AGRI	174D	✓	✓	✓				
650/55 R26.5 - BKT 693M	178D	✓	✓	✓				
650/55 R26.5 - Michelin TrialXbib	174D	✓	✓	✓				
650/55 R26.5 - Mitas Agitera	169D	✓	✓	✓				
650/55 R22.5 - Alliance 885	168D	✓	✓	✓				
560/60 R22.5 - Michelin TrialXbib VF*	166DS	✓	✓	✓	✓	✓		
560/60 R22.5 - Alliance 590	169D	✓	✓	✓	✓	✓		
560/60 R22.5 - BKT FL 693M*	165D	✓	✓	✓	✓	✓		
560/60 R22.5 - Alliance 882*	165D	✓	✓	✓	✓	✓		
560/60 R22.5 - Mitas AGRI*	165D	✓	✓	✓	✓	✓		
560/45 R22.5 - Alliance 882	152D	✓	✓		✓	✓		✓
560/45 R22.5 - Mitas AGRI	152D	✓	✓		✓	✓		✓
445/65 R22.5 - Golden Crown AT557	169K	✓	✓	✓	✓	✓		✓
445/45 R19.5 - Golden Crown AT556	160J	✓	✓	✓	✓	✓	✓	✓

*Not for high speed over 18 tonnes unless on a Tri-Axle.

Ktwo hold the right to change the tyre manufactureur to a like for like spec or higher.

COLOUR OPTIONS*



*Colour swatch is for illustrative purposes only and actual colour may differ slightly.



Model	Notes
Eco 65	50.8
Eco 75	60.9
Eco 85	75.11
Duo 80	6
Duo 105	8
Duo 120	9
Duo 135	10
Duo 150	11
Duo 165	12
Duo 180	14
Duo 155 HD	11
Duo 175 HD	12
Duo 195 HD	14
Duo 120T	9
Duo 135T	10
Duo 175T	12
Duo 195T	14
Evo 180	14
Evo 200	16
Evo 220	18
Evo 180T	14
Evo 200T	16
Evo 220T	18
Evo 2220 HD	2620
Bio 120	9
Bio 135	10
Bio 160	12
Bio 180	14
Bio 200	16
Bio 220	18
Bio 180T	14
Bio 200T	16
Bio 220T	18
Bio 2220 HD	2620

Model	Notes
Curve 1200	
Curve 1400 Compact	
Curve 1400	
Curve 1600	
Curve 1800	
Curve 2000	
Curve 2000 Tri	
Curve 2400 Tri	
Root 1400	
Root 1600	
Root 2000	
Pusher 1800 Low	
Pusher 1800	
Pusher 2000 Low	
Pusher 2000	
Pusher 2500 Low	
Pusher 2500	
DT 1400	
DT 1600	
CT 1400	
CT 1800	
CT 2000	
LL 28 Fixed Beavertail	
LL 28 Tri Fixed Beavertail	
LL 28 Hydraulic Beavertail	
LL 32 Tri Hydraulic Beavertail	
FB 26	
FB 28	
FB 30	
FB 32	
FB 40	
FB 44	



NOTES



Fowlers Field Farm, Station Road,
Haddenham, Aylesbury,
Buckinghamshire HP17 8DD

+44 (0)1844 299290
sales@ktwo.co.uk
www.ktwo.co.uk

FOLLOW US

